




Safety precautions Caution

- Strictly follow the installation manual. Incorrect installation causes damage or loss to your vehicle.
- This product is intended for exclusive use with the EXP rear ladder only, hence no other use allowed.
- DO NOT alter the product.
- It is recommended that this product be installed by a professional.
- Turn off the engine and ignition before installation.
- This product is not intended for off-road or rally use.
- Avoid strong impact and continuous vibration.
- Periodically check fittings for looseness.
- Stop using the product immediately if the bracket is cracked or deformed.
- DO NOT install lamps or any other accessories on the right side of the rear ladder. When opening the tailgate, it can come into contact with the vehicle and cause scratches and dents.
- DO NOT put your foot on the lamp stay.

Component parts

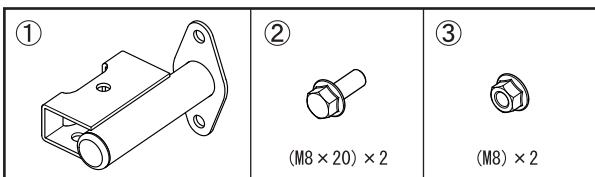

No.	Part name	No. of pcs
①	Lamp stay	1
②	Hex socket screw (M8 x 20)	2
③	Hex flange nut (M8)	2

How to install

- (1) Attach the lamp stay to the ladder main unit with included hex socket screws and hex flange nuts.
- (2) Install an IPF lamp to the stay. Lamps recommended for the installation are sold separately (part number: 642WL-1 and 642BL).

For wiring instructions, please refer to the manuals supplied with each lamp.

